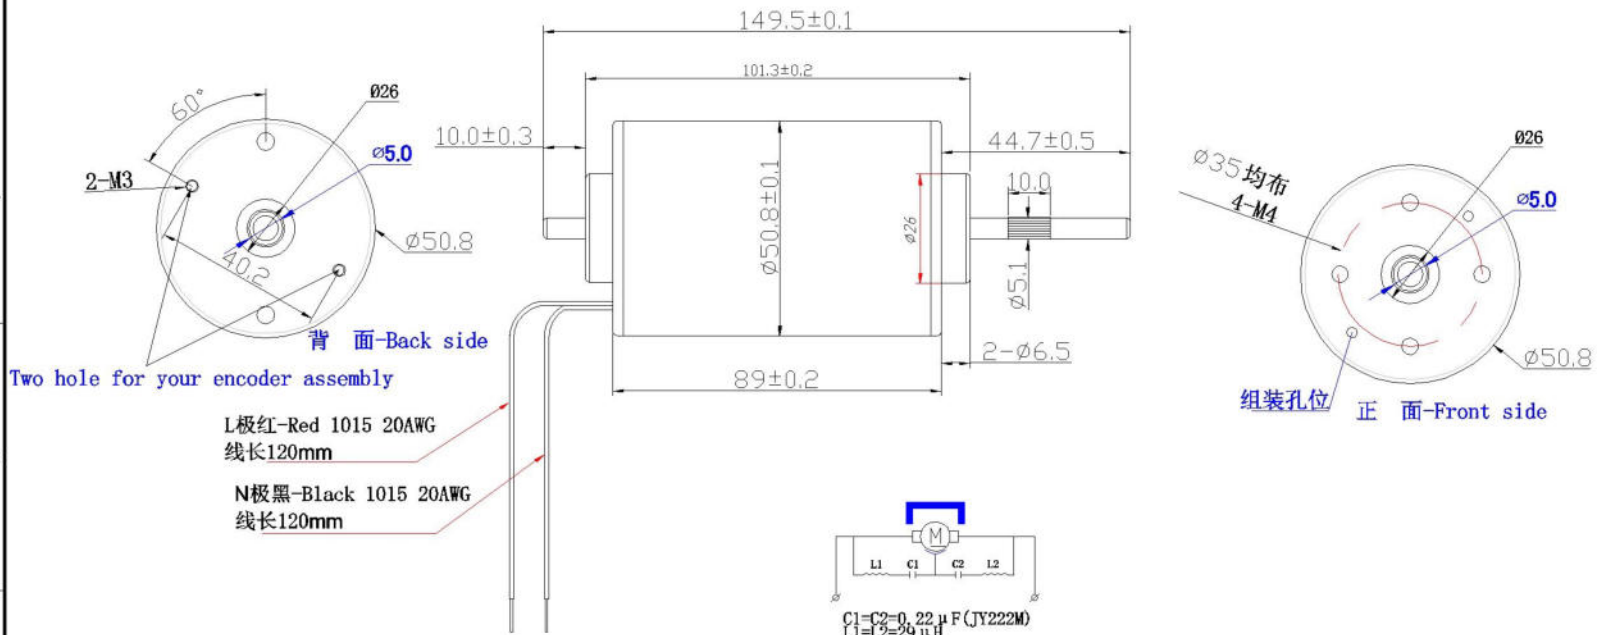

Technical Parameters

1. Input voltage: 220-240V 50Hz/60Hz full-wave rectification;
2. Input rated power: 300W, blocking power is greater than 1000W;
3. no-load power: 40W (MAX);
4. no-load speed: 10000 ± 10% RPM;
5. Direction (viewing the direction of the shaft): CW+CCW
6. insulation grade: Class F;
7. withstand voltage test: AC1500V/1sec/0.5mA;
8. the spark level is less than 1.5;
9. the noise is less than or equal to 75dB; (30cm from the motor, Ambient noise is less than 50dB)
10. life is greater than or equal to hours (to be determined); (simulated load, keep power about 100W, 1Min ON/10Min OFF)

标记	处分	分区	更改文件名	签名	年 月 日
设计	龙毅	2020.6.19	绘图	黄桂伟	
审核			标准化		
工艺			标准		

TEAMWORK GLOBAL GROUP LTD

型号	TW-DC3440
名称	3440电机总成
阶段比例	重量 / 材料 / 工艺
A	比例 FIT
REV：1	1/1

一位小数	二位小数	角度	倒角圆角
0.1	0.01	1°	0.5